



AerWay®

FRAME: The AerWay is constructed of a heavy duty center frame and two wing frames. These frames are structural steel weldments with integral weight trays. The hydraulically folded unit is equipped with a weight transfer system that permits a constant down force across the width of the machine. This system also permits the wings to follow the contours of the field. The frame has Category III front brackets and integral rear brackets for the attachment of an optional AerWay Pull Type Wheel Kit. Additional Hard Points on the frame allow for a number of attachments to be readily attached to the AerWay.


ROLLERS: The heavy duty rollers use 4 tines per row at 7.5" tine spacing. Each roller shaft is mounted with two C-Flex Springs and supported by 50mm (2") trunnion mounted bearings. The rollers are equipped with either Shattertines or Leaf Tines. All units use Outboard Stars to give uniform tine spacing across the working width of the machine.

CULTIVATION: Swing arms can be adjusted in 2.5° degree increments, from 0° to 10°, to vary the degree of cultivation or aeration.

MODEL AWF

AERWAY FOLDING FRAME MODELS

The AerWay AWF Folding Frame machine has been developed to satisfy the demands of farmers working moderate to larger acreages. AerWays Quick Adjust swing arms allow the user to choose the degree of compaction relief, cultivation, aeration, and/or residue incorporation. The AWF models are available in a variety of sizes, ranging from 20' to 30'. The AWF200 and AWF25N units have a narrow transport width of 10' 9" while the AWF25W and AWF300 units have a transport width of 15' 9".

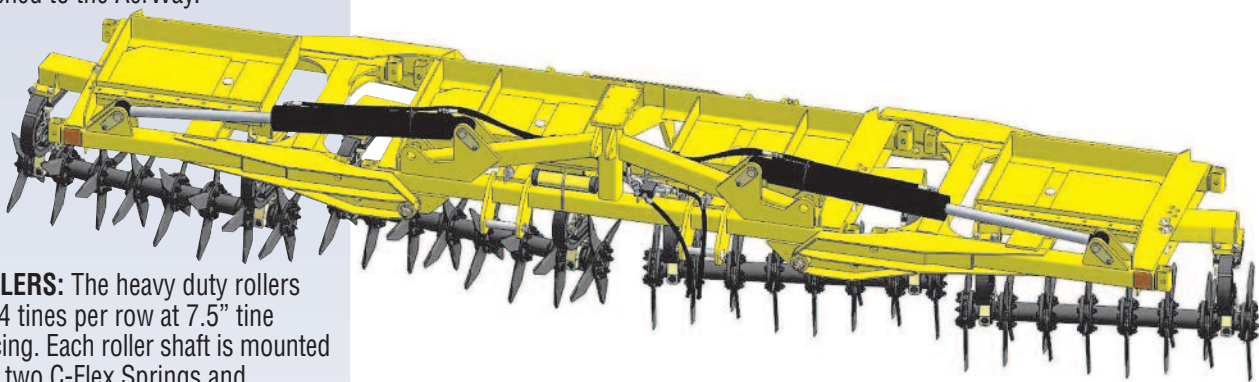

SPEC SHEET

MODEL AWF



Wing Down Pressure Valve



Quick Adjust Swing Arms



Heavy Duty Bearings



C-Flex with Outboard Star Design



AERWAY FOLDING FRAME MODELS

MODEL NUMBER	WORKING WIDTH	TRAVEL WIDTH	# OF TINES	WEIGHT	HORSEPOWER REQUIRED
AWF200	20'	10' 9"	128	5475 lbs	120-200
AWF25N	25'	10' 9"	160	6300 lbs	150-250
AWF25W	25'	15' 9"	160	6300 lbs	150-250
AWF300	30'	15' 9"	192	7125 lbs	180-300

AERWAY SYSTEM OPTIONS

- Rear Toolbar
- Rolling Baskets with Coil Tine Harrows
- Pull Type Wheel Kits
- Scraper System for Rollers
- Ballast Blocks
- Lighting Kit

PULL TYPE WHEEL KITS

The integral rear mounting brackets on the AerWay frames will accommodate the following wheel kits:

- AW-PT6700-15
(4 tire, 6 bolt for 20' only)
- AW-PT9700-15
(4 tire, heavy duty, 6 bolt)
- AW-PT9800-15
(2 tire, hwy axle, flotation)
- AW-PT9900-15
(4 tire, heavy duty, 8 bolt)



Advanced Aeration Systems

1-800-457-8310

www.aerway.com • aerway@aerway.com

SAF-HOLLAND Equipment Limited

20 Phebe Street, Norwich, Ontario N0J 1P0
Tel: 519-863-3414 • Fax: 519-863-2398

SAF-HOLLAND Canada Limited

17909 Roan Place, Surrey, B.C. V3S 5K1
Tel: 604-574-7491 • Fax: 604-574-0244

SAF-HOLLAND USA, Inc.

1301 Martinez Lane, Wylie, Texas 75098
Tel: 972-442-1761 • Fax: 972-442-2092

AerWay is manufactured by SAF-HOLLAND.
SAF-HOLLAND reserves the right to alter specifications without notice or obligation. Patented: Cdn Nos. 1173286/84./582558
U.S. Nos. 4383580/4840232 • Other patents pending.

Printed in Canada • Brochure No. XL-AW340-A • June 2009