



MODEL AWS

AERWAY STRAIGHT FRAME MODELS


AerWay®

FRAME: Four width configurations are available: 10', 12.5', 15' and 20'. The frame of the AerWay is a structural steel weldment with integral weight trays. The frame has Category III front brackets and integral rear brackets for the attachment of an optional AerWay Pull Type Wheel Kit. Additional Hard Points on the frame allow for a number of attachments to be readily attached to the AerWay.

ROLLERS: The heavy duty rollers use 4 tines per row at 7.5" tine spacing. Each roller shaft is mounted with two C-Flex Springs and supported by 50mm (2") trunnion mounted bearings. The rollers are equipped with either Shattertines or Leaf Tines. All units use Outboard Stars to give uniform tine spacing across the working width of the machine.

QUICK ADJUST: Swing arms can be adjusted in 2.5° degree increments, from 0° to 10°, to vary the degree of cultivation or aeration.

The AerWay AWS Straight Frame machine has been developed to satisfy the demands of farmers working smaller to moderate acreages. AerWays Quick Adjust swing arms allow the user to choose the degree of compaction relief, cultivation, aeration, and/or residue incorporation.

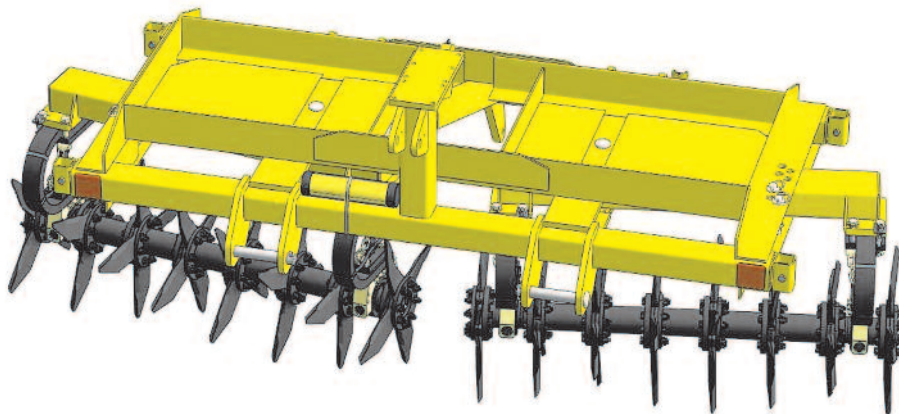

SPEC SHEET


MODEL AWS



Quick Adjust Swing Arms



Optional Pull Type Wheel Kit



Heavy Duty Bearings



C-Flex with Outboard Star Design



AERWAY SYSTEM OPTIONS

- Rear Toolbar
- Rolling Baskets with Coil Tine Harrows
- Pull Type Wheel Kits
- Scraper System for Rollers
- Ballast Blocks
- Lighting Kit

PULL TYPE WHEEL KITS

The integral rear mounting brackets on the AerWay frames will accommodate the following wheel kits:

- AW-PT6700-15
(4 tire, 6 bolt)
- AW-PT9700-15
(4 tire, heavy duty, 6 bolt)
- AW-PT9800-15
(2 tire, hwy axle, flotation)
- AW-PT9900-15
(4 tire, heavy duty, 8 bolt)

AERWAY STRAIGHT FRAME MODELS

MODEL NUMBER	WORKING WIDTH	TRAVEL WIDTH	# OF TINES	WEIGHT	HORSEPOWER REQUIRED
AWS100	10'	9' 8"	64	2225 lbs	60-100
AWS125	12' 6"	12' 2"	80	2515 lbs	75-125
AWS150	15'	14' 8"	96	2800 lbs	90-150
AWS200	20'	19' 8"	128	4200 lbs	120-200



Advanced Aeration Systems

1-800-457-8310

www.aerway.com • aerway@aerway.com

SAF-HOLLAND Equipment Limited

20 Phebe Street, Norwich, Ontario N0J 1P0
Tel: 519-863-3414 • Fax: 519-863-2398

SAF-HOLLAND Canada Limited

17909 Roan Place, Surrey, B.C. V3S 5K1
Tel: 604-574-7491 • Fax: 604-574-0244

SAF-HOLLAND USA, Inc.

1301 Martinez Lane, Wylie, Texas 75098
Tel: 972-442-1761 • Fax: 972-442-2092

AerWay is manufactured by SAF-HOLLAND.
SAF-HOLLAND reserves the right to alter specifications without notice or obligation. Patented: Cdn Nos. 1173286/84./582558
U.S. Nos. 4383580/4840232 • Other patents pending.

Printed in Canada • Brochure No. XL-AW339-A • June 2009